

# 63" wide, 6" Opening Roller Coater



## Spec Sheet

**Quick Machinery Company**  
23905 Clinton Keith 114-243  
Wildomar, CA 92595  
Phone: (707) 272-6719  
Fax: (866) 399-1308



**Machine Type:**

**ROLLER COATER GLUE SPREADER**

**Model Numbers:**

R-RCGS-1-63-6 (one-sided) or R-RCGS-2-63-6 (two-sided)

**Description:**

63" width capacity, zero to 6" opening Roller Coater

Features 8.25" diameter grooved acid- and heat-resistant SBR (EPDM available) rubber-covered glue roll(s) and 7" diameter hard rubber-covered doctor roll(s), powered by a 2hp electric motor, with either a standard fixed feed rate of 80 feet per minute or an optional variable feed rate of 40 to 118 feet per minute (or 31 to 187 fpm available). Glue spread and material thickness adjustments are made by turning chrome-plated hand wheels (or optional motorized vertical adjustment). Aluminum drip pan catches clean-up water. Includes roll guards and emergency stop bars for operator safety.

**Dimensions:**

100"W x 42"D x 62"H (shipping dimensions)

**Weight:**

Net weight 1870 lbs.; shipping weight 2100 lbs.

**Electrical Requirements:**

220v or 440v, 3-phase, 15 amps

**Price (U.S. Dollars):**

\$19,700.00 for 2-sided glue application, f.o.b. Los Angeles, CA. Includes motorized vertical roll gap adjustment, digital readout for vertical gap adjustment, forward/reverse operation, variable speed control, and roll guards, as shown.

**Please Contact:**

Kevin Quick at Quick Machinery Company, 707-272-6719

# 63" wide, 6" Opening Roller Coater



## Industrial-Duty Glue Spreader

The QUICK 63" wide, 6" opening Roller Coater Glue Spreader is a relatively low-cost, industrial-duty glue spreader for flat panels. It has been specifically designed to apply water-based PVA (white or yellow) woodworking glues to solid wood panels, wood veneers, and high-pressure laminates.


## Time-tested Design, Quality Construction

The classic 3- or 4-roll design is elegant in its simplicity and effectiveness.



The Roller Coater for 1-sided glue application has 3 rolls: On top, it has an 8.25" diameter grooved (smooth rolls or special grooving are available) rubber glue-applying roll and a 7" hard rubber-covered doctor roll. On the bottom, it has an 8" diameter rubber-covered pinch roll.

The Roller Coater for 2-sided glue application has 4 rolls: On top, it has an 8.25" diameter grooved rubber-covered glue-applying roll and a 7" hard rubber-covered doctor roll. On the bottom, it has a second 8.25" diameter grooved rubber glue-applying roll and a second 7" diameter chrome-plated doctor roll. (A 4-roll Spreader can also be used for top-only application).

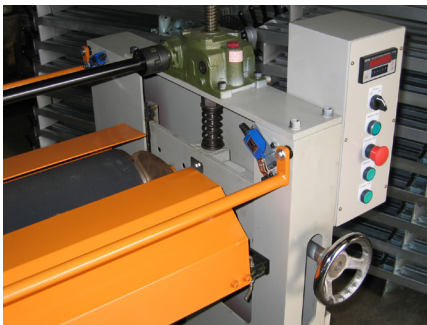

## Easy Operation & Clean-Up

Glue is placed in the trough(s) between the glue roll(s) and doctor roll(s). The glue spread and material thickness adjustments are made by turning the chrome-plated hand wheels. Or, the material thickness adjustment can be made with the optional motorized vertical adjuster, with digital readout.

Clean-up is accomplished quickly with warm water and a bristle brush. An aluminum pan catches the waste water.



## Other Sizes Available

QUICK Roller Coaters are available in widths of 17", 24", 36", 42", 48", 54" and 63", and maximum openings of either 1.75" or 6".

*For additional information, including high-resolution photographs and Quicktime movies of our Glue Spreaders in operation, please visit our web site, or request a copy of our QUICK CD-ROM.*



Value Leader in Gluing Equipment

## Quick Machinery Company

23905 Clinton Keith 114-243, Wildomar, CA 92595

Phone: (707) 272-6719, Fax: (866) 399-1308

E-mail: [kevin@quickmachinerycompany.com](mailto:kevin@quickmachinerycompany.com)

[www.quickmachinerycompany.com](http://www.quickmachinerycompany.com)